



### KLT tipping trailers, a reliable workhorse

These budget friendly, backwards tipping trailers benefit from a low unladen weight meaning they can be used for many applications. The tipping function is operated manually from the A-frame position. The wheel position under the loading floor gives the Anssems KLT a large load area which is easily accessible with the side- and rear panel lowered. All KLT models come as standard with multiple tie down points to help keep your load secure.



### Durable and low weight

The manufacture of the KLT chassis is extremely accurate using state of the art CNC laser cut and robot welded profiles. All parts of the chassis are fully galvanized. The strong loading floor is made of high grip waterproof plywood which is supported by heavy duty galvanised steel cross members. Thanks to the smart design the KTL range maintains maximum load capacity.



Premium quality

brake system

Standard equipped

with jockey wheel

Extended

A-frame



8 Tie hooks on the

edge of the loading floor

Turnable

side- and


back panels



### Multiple possibilities

The KLT backwards tipping trailers offer great performance. You can increase the performance and usability by mounting the KLT accessories. Anssems offer plenty of optional extras within the KLT range. Create the tipper that will meet all your requerements.

# "THE EXTENDED PANELS ARE MY NUMBER ONE ACCESSORIES"





The 30 cm extension sides create a total loading height of no less than 60 cm. The flat cover is easy to assemble, also in combination with the extension sides.



Accessorie: axle shock absorbers for extra driving comfort



Accessorie: spare wheel



Accessorie: spare wheel support



Accessorie: net hooks



Accessorie: steel ladder rack



Accessorie: flat cover



## Comfort and manoeuvrability


The user friendly towing properties and reliable braking and lighting system guarantees safe and simple operation. Thanks to its compact size and simple operation the KLT Trailer makes light work of transporting bulk goods, such as building materials, logs or garden waste to site.






Туре	KLTB 1350 251x150	KLTT 1350 305x150	KLTT 2000 305x150
Gross capacity	1350 kg	1350 kg	2000 kg
Axles pcs	1	2	2
Braked or unbraked version	braked	braked	braked
Unloaden trailer weight	300 kg	360 kg	380 kg
Load capacity	1050 kg	990 kg	1620 kg
Tipping operation	manual	manual	manual
Internal length (A)	251 cm	305 cm	305 cm
Internal width (B)	150 cm	150 cm	150 cm
Floor height (C)	68 cm	66 cm	67 cm
A-Frame length (D)	105 cm	105 cm	105 cm
Total length (E)	365 cm	419 cm	419 cm
Total width (F)	159 cm	159 cm	159 cm
Total height (G)	98 cm	96 cm	97 cm
Side panel heigth (H)	30 cm	30 cm	30 cm
Wheel / tyresize	185/70R13	145/80R13	155/80R13

Accessories	KLTB 1350 251x150	KLTT 1350 305x150	KLTT 2000 305x150
Flat cover	v	v	v
Extension sides (height 30 cm)	v	v	v
Ladder rack (height 75 cm)	v	v	v
Tie hooks	v	v	v
Aluminium ramps for universal use	v	v	v
Spare wheel with support	v	v	v
Axle shock absorbers	v	v	v

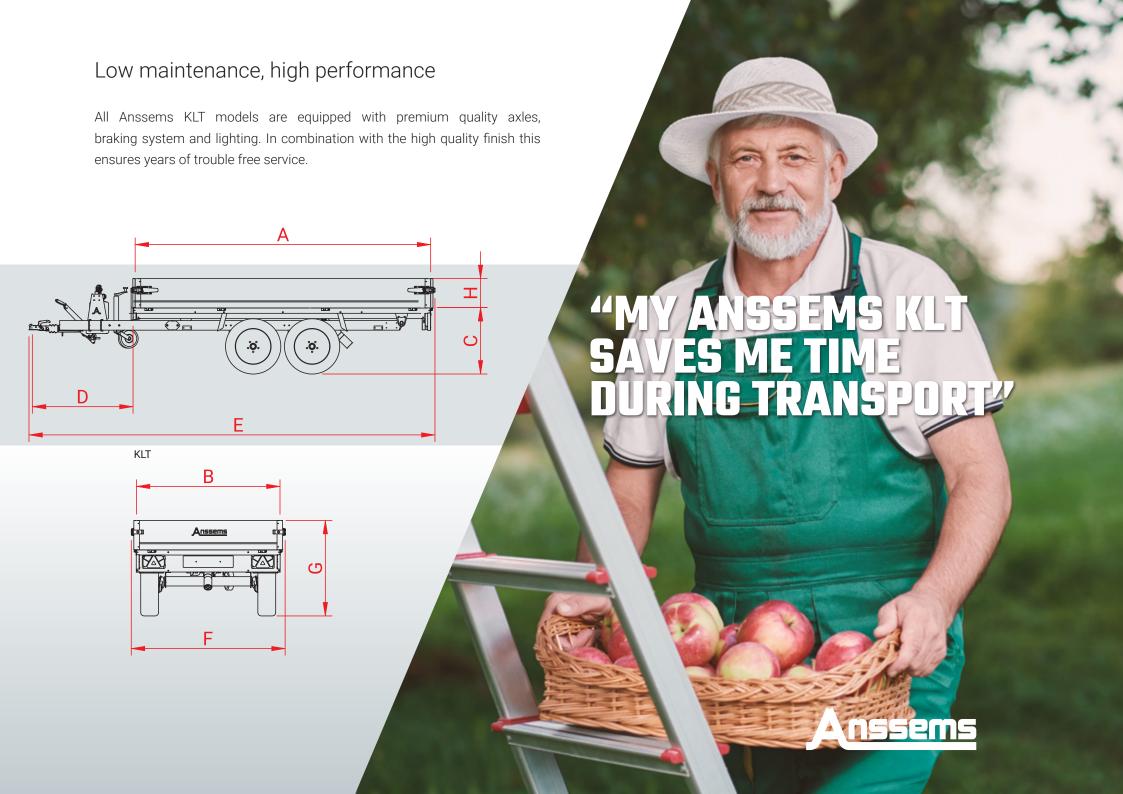

### Typical Anssems

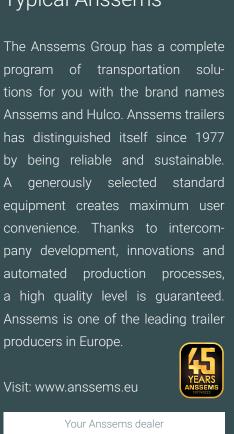









A Low loader trailers GT-0

A Flatbed trailers PLT













A Flatbed trailers ASX









A Box van trailers GT-VT2 / GT-VT3 / GT-VT4



Wide range of accessories





**TERRAX** 

GT-HT / GT-VT1

A Welfare trailers PTS