

A MULTIPUPOSAL CHAMELEON



Anssems

LOW LOADER TRAILERS **GT-O / GT-R**

LOW LOADER TRAILERS

FLATBED TRAILERS

MULTIPURPOSE TRAILERS

CAR TRANSPORTERS

TIPPING TRAILERS

HARD TOP COVER TRAILERS

BOX VAN TRAILERS

HORSE TRAILERS

WELFARE TRAILERS





**“MY ANSSEMS GT
ALLOWS ME TO MOVE
EVERYTHING”**

GT: Low-loader for volume transport

The 15 Anssems GT models all stand out due to their ergonomic design and unique features. Maximum load capacity is created by using lightweight but strong materials. The external wheel position ensures maximum stability when loading and towing. The low floor height ensures easy loading and unloading. All GT-R trailers come standard fitted with a fixed perimeter railing and ladder rack. With the large range of GT accessories, you can assemble the ultimate multipurpose trailer that meets your needs.



Anssems GT-O single-axle unbraked



Anssems GT-O tandem braked




Anssems GT-R single-axle unbraked



Anssems GT-R tandem braked

We've thought of everything

During the designing process, Anssems has thought of every detail. The extended A-frame or straight drawbar, and innovative aluminium construction, ensure that the GT is an extremely stable and easy-to-maintain trailer. All models are equipped with a strong jockey wheel. The lighting, jockey wheel, axles, couplings, and braking system are all of premium quality.



Extended A-frame
for excellent floor support



Reliable and
clear lighting



Front lights
(width 126 cm and wider)




Turnable
back panel



Railing for movable
net hooks integrated



Railing for movable
tie eyes integrated



Strong plywood
high grip floor



Deliverable from
750 kg as a
braked version

Aluminium
panels

Steel railing
and
ladder rack

Plywood
high grip
floor

Durable
plastic
mudguards

Integrated rail
for movable
net hooks

Tandem axle
equipped with steel
mudguards

Straight drawbar
out of tube-profile
(width 101 cm)

Standard
equipped with
jockey wheel

Stabil A-frame made
out of U-profile
(width 126 cm)

Marker lights
(width 126 cm and
wider)

Sparkling
refelctors

Fixed
tie-hooks



Anssems

A smiling man with short dark hair, wearing a red and blue plaid shirt over a grey t-shirt, is holding a potted plant with green leaves and red flowers. He is looking towards the camera with a friendly expression.

**“THE ANSSEMS GT
MEETS ALL MY
EXPECTATIONS”**

GT-O: multipurpose low-loaders

The Anssems GT-O is a great low-loader trailer and a wide range of accessories are available to personalize it to suit your needs. Aluminium extension sides or mesh side panels allow you to transport bulk goods such as firewood and garden waste. A mounted tailgate ramp (in combination with mesh sides) increases the usability of loading and unloading the Anssems GT-O using a wheelbarrow.



Every load a save transport

All GT O/R Low loaders are standard equipped with an integrated rail to position tie-down points at whatever point you need to keep your load safe and secure, while still being able to fit a flat cover.



Accessorie: universal aluminium ramps



Accessorie: flat cover, easy to mount



Accessorie: extension sides, internal height 65 cm



Accessorie: Spare wheel, mounting under floor is possible



Accessorie: cover, turnable to the front



Accessorie: Axle shock absorbers for extra comfort



Accessorie: Propstand for extra comfort during loading and unloading



The aerodynamic high cover is a well-chosen accessory. It protects your cargo during transportation.



Mesh sides with a height of 70cm will increase the load capacity, making them ideal for transporting bulk goods. This picture shows the GT-O in combination with a tailgate ramp and prop stands.



By mounting a hard top cover, you can close and lock your cargo, transporting it safely and securely.

Anssems



Model	GT 500 151x101		GT 500 181x101		GT 750 201x101		GT 750 211x126		GT 750 251x126		GTB 750 211x126		GTB 750 251x126		GTB 1200 251x126		GTB 1200 301x126	
	O	R	O	R	O	R	O	R	O	R	O	R	O	R	O	R	O	R
Gross capacity	500 kg		500 kg		750 kg		750 kg		750kg		750 kg		750 kg		1200 kg		1200 kg	
Unladen trailer weight	110 kg	122 kg	115 kg	128 kg	120 kg	134 kg	140 kg	157 kg	150 kg	168 kg	155 kg	172 kg	165 kg	183 kg	195 kg	213 kg	205 kg	224 kg
Load capacity	390 kg	378 kg	385 kg	372 kg	630 kg	616 kg	610 kg	593 kg	600 kg	582 kg	595 kg	578 kg	585 kg	567 kg	1005 kg	987 kg	995 kg	976 kg
Axles pcs	1		1		1		1		1		1		1		1		1	
Braked version	x		x		x		x		x		v		v		v		v	
Wheel / tyresize	145/80R13		145/80R13		145/80R13		145/80R13		145/80R13		145/80R13		145/80R13		185/70R13		185/70R13	
Floor type	plywood		plywood		plywood		plywood		plywood		plywood		plywood		plywood		plywood	
Inner size (A, B, H)	151x101x30 cm		181x101x30 cm		201x101x30 cm		211x126x30 cm		251x126x30 cm		211x126x30 cm		251x126x30 cm		251x126x30 cm		301x126x30 cm	
Floor height (C)	48 cm		48 cm		49 cm		49 cm		49 cm		49 cm		49 cm		49 cm		49 cm	
A-Frame length (D)	66 cm		86 cm		86 cm		90 cm		90 cm		96 cm		96 cm		96 cm		96 cm	
Total length (E)	229 cm		279 cm		299 cm		313 cm		353 cm		319 cm		359 cm		359 cm		409 cm	
Total width (F)	146 cm		146 cm		146 cm		171 cm		171 cm		171 cm		171 cm		175 cm		175 cm	
Total height (G)	78 cm	124 cm	79 cm	124 cm	79 cm	125 cm	79 cm	125 cm	79 cm	125 cm	79 cm	125 cm	79 cm	125 cm	79 cm	125 cm	79 cm	125 cm
Side rail height (I)	-	40 cm	-	40 cm	-	40 cm	-	40 cm	-	40 cm	-	40 cm	-	40 cm	-	40 cm	-	40 cm
Ladder rack height (J)	-	76 cm	-	76 cm	-	76 cm	-	76 cm	-	76 cm	-	76 cm	-	76 cm	-	76 cm	-	76 cm

Accessoires	GT 500 151x101		GT 500 181x101		GT 750 201x101		GT 750 211x126		GT 750 251x126		GTB 750 211x126		GTB 750 251x126		GTB 1200 251x126		GTB 1200 301x126	
	O	R	O	R	O	R	O	R	O	R	O	R	O	R	O	R	O	R
High cover (internal height 120 cm)	v	v	v	v	v	v	x	x	x	x	x	x	x	x	x	x	x	x
High cover (internal height 150 cm)	x	x	x	x	x	x	v	v	v	v	v	v	v	v	v	v	v	v
Ladder rack (height 76 cm)	v	s	v	s	v	s	v	s	v	s	v	s	v	s	v	s	v	s
Side rail	v	s	v	s	v	s	v	s	v	s	v	s	v	s	v	s	v	s
Flat cover	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Hard top cover, turning sideways	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x
Hard top cover, turning forwards	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x
Spare wheel with support	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Axle shock absorber	x	x	x	x	x	x	x	x	x	x	v	v	v	v	v	v	v	v
Propstands	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Tie eye M8	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Net hooks	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Extension sides (height 35 cm)	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x
Mesh sides (height 70 cm)	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x
Tailgate ramp* (H 100 cm)	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x	v	x
Tailgate ramp* (H 135 cm)	x	x	x	x	x	x	v	x	v	x	v	x	v	x	v	x	v	x
Tailgate ramp* (H 170 cm)	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Universal aluminium ramps**	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v

*Tailgate ramp can only be mounted in combination with mesh sides. ** Ramps: 150, 200 and 250 cm

S standard equipment

V available as an accessor

X no accessory

Model	GTT 750 251x126		GTT 1500 251x126	GTT 1500 301x126	GTT 2000 251x126	GTT 2000 301x126	GTT 2000 301x151
	O	R	O	O	O	O	O
Gross capacity	750 kg		1500 kg	1500 kg	2000 kg	2000 kg	2000 kg
Unladen trailer weight	240 kg	258 kg	240 kg	250 kg	262 kg	278 kg	340 kg
Load capacity	510 kg	492 kg	1260 kg	1250 kg	1738 kg	1722 kg	1660 kg
Axes pcs	2		2	2	2	2	2
Braked version	x		v	v	v	v	v
Wheel / tyresize	145/80R13		145/80R13	145/80R13	155/80R13	155/80R13	155/80R13
Floor type	plywood		plywood	plywood	plywood	plywood	plywood
Inner size (A, B, H)	251x126x30 cm		251x126x30 cm	301x126x30 cm	251x126x30 cm	301x126x30 cm	301x151x30 cm
Floor height (C)	49 cm		49 cm	49 cm	51 cm	51 cm	51 cm
A-Frame length (D)	90 cm		96 cm	96 cm	96 cm	96 cm	123 cm
Total length (E)	353 cm		359 cm	409 cm	359 cm	409 cm	436 cm
Total width (F)	168 cm		168 cm	168 cm	168 cm	168 cm	193 cm
Total height (G)	79 cm	125 cm	79 cm	79 cm	81 cm	81 cm	81 cm
Side rail height (I)	-	40 cm	-	-	-	-	-
Ladder rack height (J)	-	76 cm	-	-	-	-	-





Accessories	GTT 750 251x126		GTT 1500 251x126	GTT 1500 301x126	GTT 2000 251x126	GTT 2000 301x126	GTT 2000 301x151
	O	R	O	O	O	O	O
High cover (internal height 120 cm)	x	x	x	x	x	x	x
High cover (internal height 150 cm)	v	v	v	v	v	v	v
Ladder rack (height 76 cm)	v	s	v	v	v	v	v
Side rail	v	s	v	v	v	v	v
Flat cover	v	v	v	v	v	v	v
Hard top cover, turning sideways	v	x	v	v	v	v	v
Hard top cover, turning forwards	v	x	v	v	v	v	v
Spare wheel with support	v	v	v	v	v	v	v
Axle shock absorber	x	x	v	v	v	v	v
Propstands	v	v	v	v	v	v	v
Tie eye M8	v	v	v	v	v	v	v
Net hooks	v	v	v	v	v	v	v
Extension sides (height 35 cm)	v	x	v	v	v	v	v
Mesh sides (height 70 cm)	v	x	v	v	v	v	v
Tailgate ramp* (H 100 cm)	v	x	v	v	v	v	x
Tailgate ramp* (H 135 cm)	v	x	v	v	v	v	v
Tailgate ramp* (H 170 cm)	x	x	x	x	x	x	v
Universal aluminium ramps**	v	v	v	v	v	v	v

*Tailgate ramp can only be mounted in combination with mesh sides. ** Ramps: 150, 200 and 250 cm

S standard equipment

V available as an accessor

X no accessory

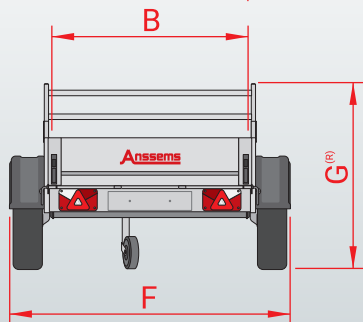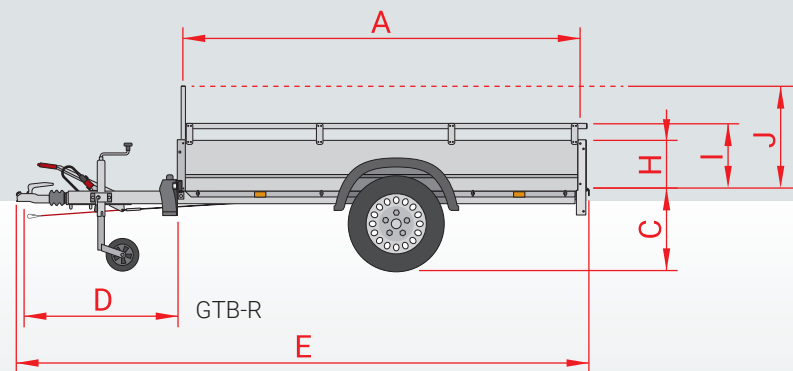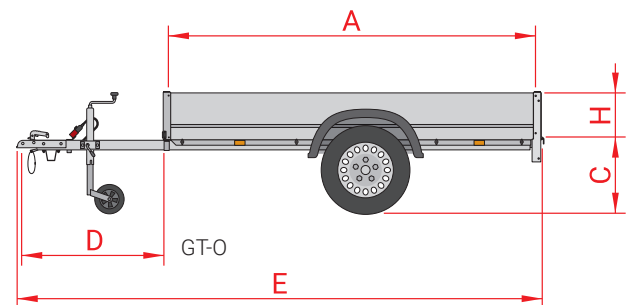

Anssems

Anssems

Always behind you.

Anssems offers a complete range of transport solutions of flawless quality, and has been doing so since 1977. Our standard, richly equipped trailers are perfect for professional and private users. Our modern machinery is extremely accurate and ensures a consistent high-quality output. Our team checks the result to guarantee a perfect finish. We produce to the highest standards, with user comfort and safety being our top priority. Anssems, when things gets tough, we're right behind you.

Visit: www.anssems.eu



Your Anssems dealer

AB2302EN-GTOR



Anssems

The Anssems group

Anssems Aanhangwagens B.V.
Ericssonstraat 50
NL-5121 ML Rijen

Anssems Anhänger GmbH
Londoner Straße 15
D-48455 Bad Bentheim-Gildehaus

Anssems Remorques Sarl
Rue Pierre Brossollette
FR-58600 Garchizy

Hulco Trailers GmbH
Wiener Straße 34
D-48455 Bad Bentheim-Gildehaus